

4MP OUTDOOR IP SPEED DOME CAMERA

YUC-KX10-R



Feature

- H.264+ (H.265) 4MP/1520P 25fps IP IR speedome
- 10X optical zoom with 4X digital zoom
- Digital image stabilization / Digital WDR
- Smart IR, with distance 70 Meter
- Point- to- go for easy PTZ control (patrol groups)
- ROI function x 3 areas & Privacy zone mask x 6 are
- Support cruise x 8 groups & 256 preset points
- ESD & surge protection design
- -20~60°C wide temperature range
- Built-in Micro SD for option
- Mobile view support (push video)
- POE support
- ONVIF compliant



Save Until 50% of HDD Space



Point- To- Go




Patrol



Region of Interest



Privacy Mask

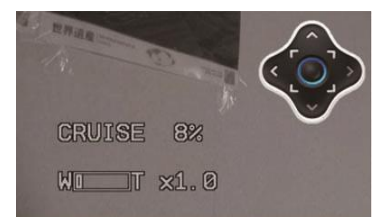

Cruise

YUC-KX10-R

Server	Compression	H.264+(H.265) / H.264 / M-JPEG
	Resolution	2592x1520@25fps, 1920x1080@30fps, 1280x720@30fps, 640x360@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(25fps) 2592x1520
	Safety	User-ID and password, IP address filtering, HTTP encryption, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD / FTP / NAS(Samba) / E-mail/DO
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule
Network Camera	Sensor	1/3" Megapixel CMOS Sensor
	Optical Lens	10X optical zoom lens / f=5 - 50mm / F1.6 - 1.8
	Shutter Time	1/1 ~ 1/5000
	Min Illum	0.08Lux(Color) / 0.03Lux(B/W)
	IR LED / Range	8pcs / 70M
	Sense up	--
	View Angle	Wide: 6.99°~51.04° / Tele: 4.17°~30.63°/s
	Pan / Tilt Range	Pan: 360° / Tilt: 0°~90° auto flip
	Manual Control Speed	Pan: 0.45°~90°/s / Tilt: 0.35°~45°/s
	Day / Night	Auto / Color / B/W / Time Mode with auto ICR
	Intelligent Video	D-WDR / Cruise / Point-To-Go / Diagonal Movement / Digital Image Stabilizer / Preset Point (Patrol Group) / Privacy Mask
Audio	Audio	N/A
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI X 1
	SD Card	Built-in Micro SD for option
General	Operation Voltage	DC 36V Max: 14.5W (IR ON) 8.5W (IR OFF) PoE Max: 15W (IR ON) 9W (IR OFF)
	Dimen./Weight	135mm(φ) x198 mm(H) / 1.75 Kgs (without bracket)
	Operation Temp.	-20°C ~ +60°C (standard)
	Waterproof	IP66

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Dimension

