


2MP IP OUTDOOR CAMERA

YUC-H5826A

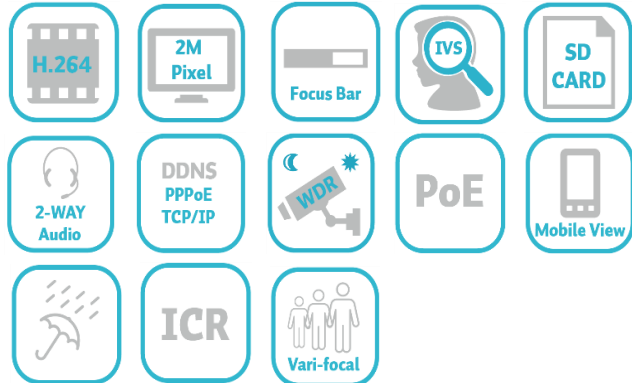

Feature


- H.264 2MP/1080P 30fps IP Camera
- Outdoor use for variety application
- Anti-fog / Corridor mode / Distortion correction smart function
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 2.8-12mm
- Support SD card continuous recording
- Day/night profile and smart IR
- Analogue output
- Weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant



Distortion Correction



Corridor Mode

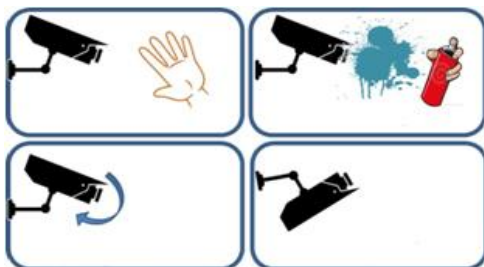

Tampering Detection



IR Optimizer

Specification

YUC-H5826A

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 / DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.7" Megapixel CMOS sensor
	Optical Lens	2.8 - 12mm / F1.4
	View Angle	33° ~ 97°(H) , 20° ~ 48°(V)
	D-WDR	Off & 1~8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.05 Lux(Color) / 0.01 Lux(B/W)
	IR LED / Range	8pcs Array LED / 30M
	Day / Night	Yes
	Intelligent Video	Anti-fog / Focus bar / Distortion Correction / Tampering Detection / IR Optimizer / D-WDR / Motion Detection / Privacy Mask / 3D-De Noise Reduction
Audio	Audio	2-way half duplex
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	3.5mm phone jack(Support 2-way)
	Audio Out	3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE / WiFi(802.11/b/g/n)
	Video Interface	BNC , Video composi(NTSC/PAL)
	External Port	DI / DO
	SD Card	Micro SD
General	Operation Voltage	DC 12V Max : 4.8W(IR on) / 2.76W(IR off) PoE Max: 6.72W(IR on) / 3.84W(IR off)
	Dimen./Weight	310mm(L) x 150mm(W) x 115mm(H) / 1100g
	Operation Temp.	-20°C ~ +50°C
	Waterproof	IP66

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Accessories



YUK-205AW

Wall Mount bracket (option)