

2MP IP BOX CAMERA

YUC-H6E6

Star Light




Feature

- H.264 2MP/30fps, Sony Xarina E Solution/Exmor CMOS Sensor
- Excellent night vision performance with low noise(3D-De Noise)
- Remote motion storage to google Drive and Dropbox
- Support SD card continuous recording
- 3 areas motion detection & 3 areas privacy mask
- 3 steps IR control
- Day/night profile adjustment
- Mobile view support (push video)
- POE support
- ONVIF compliant




3-step IR Intensity

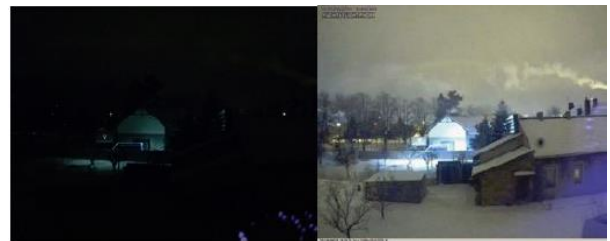

Excellent low light



Distortion Correction

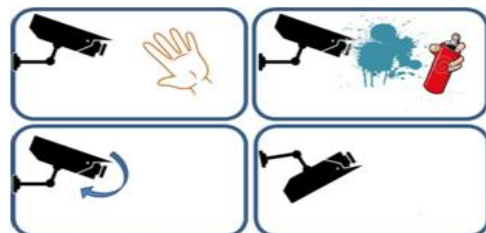

Tampering Detection

Specification

YUC-H6E6

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080@30fps, 1280x1024@30fps, 1280x960@30fps, 1280x720@30fps, 800x600@30fps, 800x480@30fps, 640x480@30fps, 640x360@30fps, 320x240@30fps, 176x144@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	User-ID and password
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail / Google Drive / Dropbox
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection/ Schedule / Tampering Detection
Network Camera	Sensor	1/2.9" Sony Exmor CMOS sensor
	Optical Lens	2.8-12mm @ F1.4 CS mount(DC driver)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.008 Lux (Color), 0.003 Lux (B/W)
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3D Noise Reduction / IR Intensity / Anti-fog / Distortion correction / Temperature detection
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	Mic built- in (Support 2-way)
	Audio Out	3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11/b/g/n)
	Video Interface	-
	External Port	DI / DO
	SD Card	Micro SD Card(Recording trigger for schedule, motion detertion, IP check, network wire break down, DI)
General	Operation Voltage	DC 12V Max:2.2W PoE Max:3.4W
	Dimen./Weight	65mm(W) x 58mm(H) x 132mm(L) / 450g
	Operation Temp.	-20°C ~ +50°C

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Design Features

