

2MP IP BULLET CAMERA

YUC-H7926/50 YUC-H7926/70



Feature


- H.264 2MP/1080P 30fps IP Camera
- Long Distance for 50M and 70M
- Anti-fog / Corridor mode / Distortion correction smart function
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 7-22mm
- ESD & surge protection design
- Support SD card continuous recording up to 64G
- Day/night profile and smart IR
- Analogue output
- Weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant



Distortion Correction



Corridor Mode

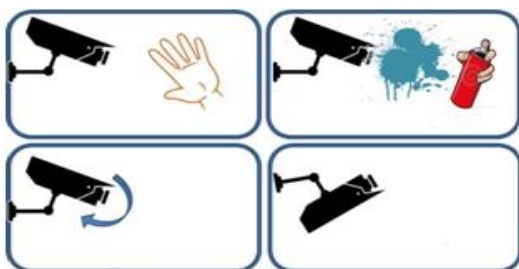

Tampering Detection



IR Optimizer

Specification

YUC-H7926/50 YUC-H7926/70

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 / DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.7" Megapixel CMOS sensor
	Optical Lens	7 - 22mm / F1.4
	View Angle	17.2° ~ 46.7°(H) , 9.7° ~ 23.9°(V)
	D-WDR	Off & 1~8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.05 Lux(Color) / 0.01 Lux(B/W)
	IR LED / Range	56pcs / 50M 35pcs + 4pcs High Power / 70M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	Anti-fog / Focus bar / Distortion Correction / Tampering Detection / IR Optimizer / D-WDR / Motion Detection / Privacy Mask / 3D-De Noise Reduction
Audio	Audio	2-way half duplex
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	3.5mm phone jack(Support 2-way)
	Audio Out	3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE / WiFi(802.11/b/g/n)
	Video Interface	BNC , Video composited(NTSC/PAL)
	External Port	DI / DO
	SD Card	Micro SD(up to 64GB)
General	Operation Voltage (50M)	DC 12V Max : 7.8W(IR on) / 4.08W(IR off) PoE Max: 10.08W(IR on) / 4.32W(IR off)
	Operation Voltage (70M)	DC 12V Max : 8.88W(IR on) / 4.08W(IR off) PoE Max: 11.04W(IR on) / 4.32W(IR off)
	Dimen./Weight	114mm(φ) x 260mm(H) / 1350g
	Operation Temp.	-20°C ~ +50°C , -40°C ~ +50°C (YUC-H7926A/H)
	Waterproof	IP66

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Design Features



External zoom / Focus adjustment

Dimension

