

4MP IP MINI DOME CAMERA

YUC-HH82



Feature

- H.264 4MP (2688x1520) 30fps real time
- Advanced compression technology reduce 20% bandwidth
- Remote motion storage to google Drive and Dropbox
- Tampering detection & 3 motion area setup
- Remote motion storage to google Drive and Dropbox
- Day / night profile adjustment
- Support SD card continuous recording
- IR optimizer
- WPS support
- Mobile view support (push video)
- POE support
- ONVIF compliant
- P2P function option




IR optimizer



Save Until 20% of HDD Space



Privacy Mask

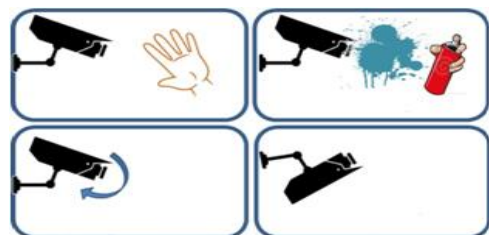

Tampering Detection

Specification


YUC-HH82

Server	Compression	H.264 / MJPEG
	Resolution	2688x1520@30fps, 1920x1080@30fps, 1280x720@30fps, 640x360@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)2688x1520
	Safety	User-ID and password
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD / FTP / NAS(Samba) / E-mail / Google Drive / Dropbox
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering Detection
Network Camera	Sensor	1/3" Megapixel CMOS sensor
	Optical Lens	3.6mm / F2.1
	View Angle	78.54°(H), 45.43°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.15 Lux (Color), 0.08 Lux (B/W)
	IR LED / Range	6pcs / 5M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / Noise Reduction / IR optimizer
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	Mic built-in (Support 2-way)
	Audio Out	Interior line out (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE / WiFi(802.11b/g/n)
	Video Interface	--
	External Port	DI / DO
	SD Card	Micro SD Card (Recording trigger for schedule, motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 4.2W(IR on) / 3.6W(IR off) PoE Max: 5.5W(IR on) / 4.8W(IR off)
	Dimen./Weight	100mm(φ) x 49mm(H) / 180g
	Operation Temp.	-20°C ~ +45°C

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Dimension

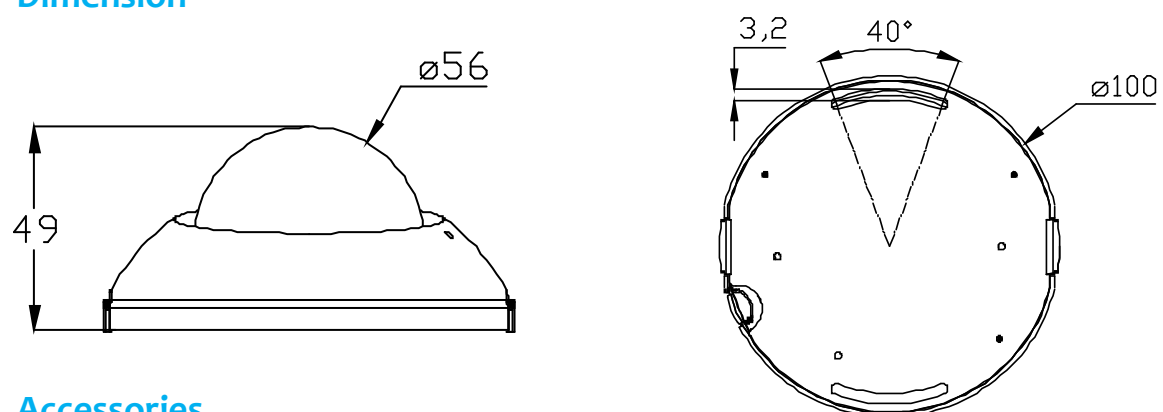

Accessories

