

2MP IP DOME CAMERA

YUC-HL26A



Feature


- H.264 2MP/1080P 30fps IP Camera
- Anti-fog / Corridor mode / Distortion correction smart function
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 3-9mm
- ESD & surge protection design
- Support SD card continuous recording up to 64G
- Day/night profile and smart IR
- Analogue output
- Mobile view support (push video)
- POE support
- ONVIF compliant



Distortion Correction



Corridor Mode

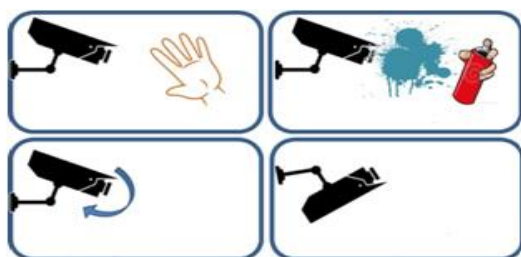

Tampering Detection



IR Optimizer

Specification


YUC-HL26A

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 / DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.7" Megapixel CMOS sensor
	Optical Lens	3 ~ 9mm / F1.8
	View Angle	31.3° ~ 104.5°(H) , 17.1° ~ 59.6°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.05 Lux(Color) / 0.01 Lux(B/W)
	IR LED / Range	18pcs / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI Input
	Intelligent Video	Anti-fog / Focus bar / Distortion Correction / Tampering Detection / IR Optimizer / D-WDR / Motion Detection / Privacy Mask / 3D-De Noise Reduction
Audio	Audio	2-way half duplex
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	Interior line in (Support 2-way)
	Audio Out	Interior line out (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	BNC, Video composited(NTSC/PAL)
	External Port	DI / DO
	SD Card	SD Card(Up to 64GB)
General	Operation Voltage	DC 12V Max: 3.96W(IR on) / 2.52W(IR off) PoE Max: 5.28W(IR on) / 3.36W(IR off)
	Dimen./Weight	132mm(Φ) x 108mm(H) / 680g
	Operation Temp.	0°C ~ +45°C

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina


Dimension

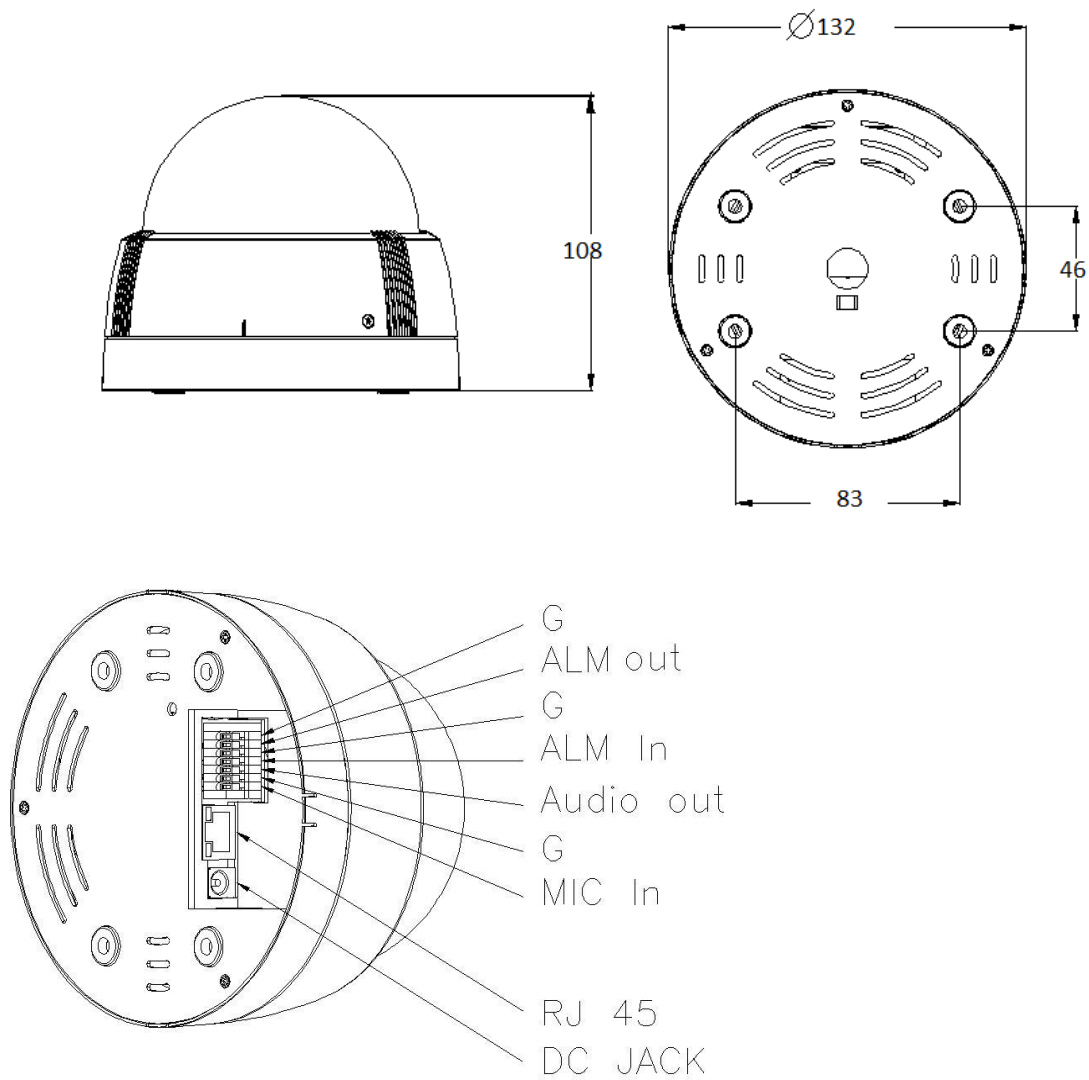

Accessories



YUK-D07
L-Type bracket (option)



YUK-D11
Hidden ceiling mount (option)

