

5MP IP DOME CAMERA

YUC-HL882



Feature

- H.264 5MP (2592x1944) 20fps IP Camera
- Advanced compression technology reduce 20% bandwidth
- Excellent night vision performance with low noise
- Remote motion storage to google Drive and Dropbox
- Built-in varifocal lens 3-10.5mm
- ESD & surge protection design
- Support SD card continuous recording up to 64G
- 3 steps IR control
- Day/night profile adjustment
- 3-Axis angle adjust
- Mobile view support (push video)
- POE support
- ONVIF compliant
- P2P function option




3-step IR Intensity



Privacy Mask



Save Until 20% of HDD Space

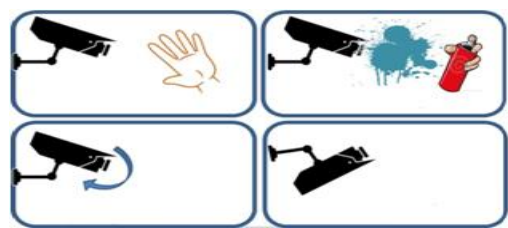

Tampering Detection

Specification


YUC-HL882

Server	Compression	H.264 / MJPEG
	Resolution	2592x1944 @20FPS / 2048 x 1536 @20FPS / 1920x1080 @30FPS / 1280x720 @30FPS / 640x480 @30FPS / 320 x 240 @30FPS
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(20fps)2592x1944 , (30fps)1920x1080
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail / Google Drive / Dropbox
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering detection
Network Camera	Sensor	1/3.2" Megapixel CMOS sensor
	Optical Lens	Vari-focal 3 ~ 10.5mm/ F1.4
	View Angle	26.94~70.25°(H), 20.17~51.16°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.5 Lux(Color) / 0.1 Lux(B/W)
	IR LED / Range	10pcs + 2pcs High Power / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3DDNR / IR Intensity
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	Interior line in (Support 2-way)
	Audio Out	Interior line out (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI / DO
	SD Card	SD Card (Recording trigger for schedule, motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 6.60W(IR on) / 3.84W(IR off) PoE Max: 7.98W(IR on) / 5.13W(IR off)
	Dimen./Weight	132mm(Φ) x 108mm(H) / 680g
	Operation Temp.	-20°C ~ +50°C

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina


Dimension

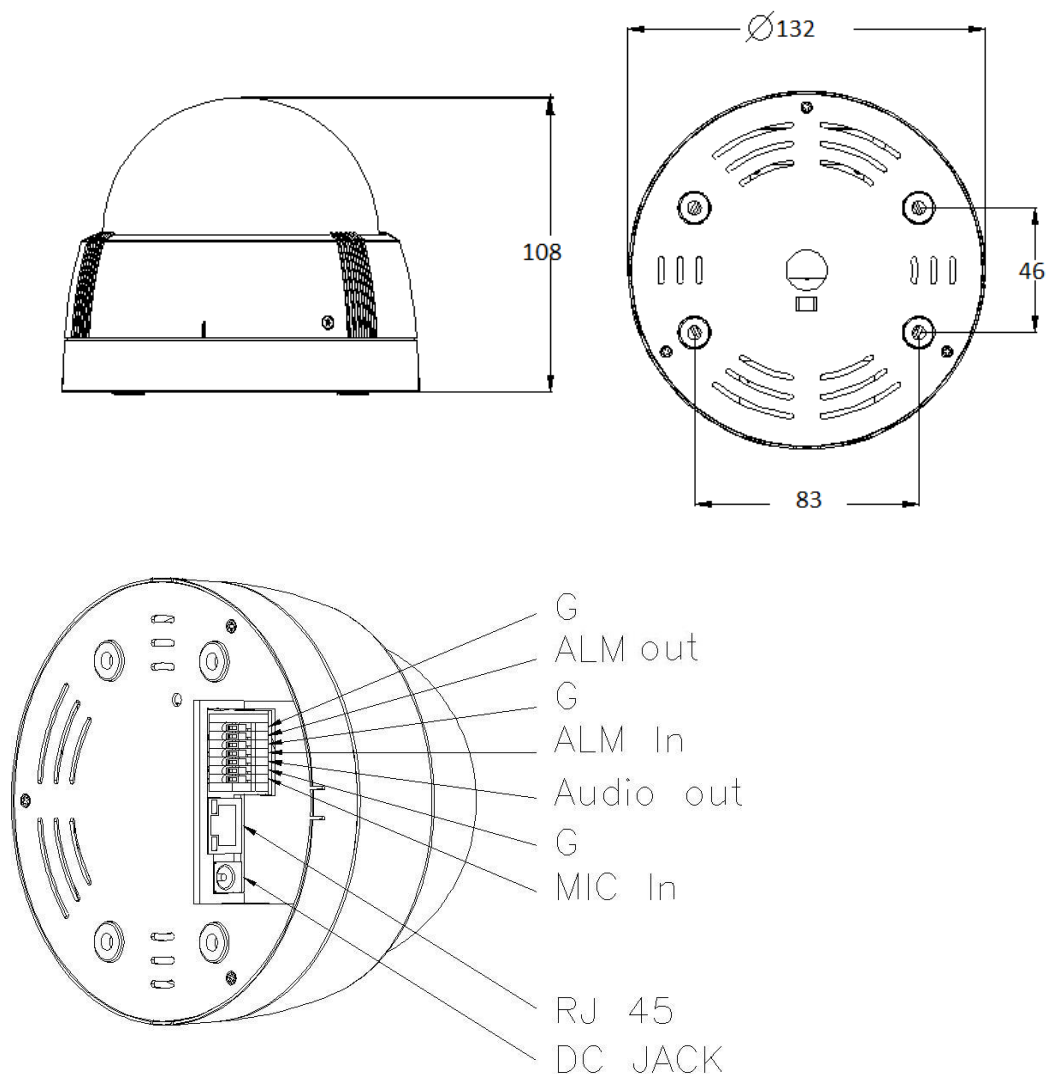

Accessories



YUK-D07
L-Type bracket (option)



YUK-D11
Hidden ceiling mount (option)

