

4K2K IP DOME CAMERA

YUC-HL89



Feature



- H.264 4K2K (3840 x 2160) 15fps IP Camera for exceptional detail
- Advanced compression technology reduce 20% bandwidth
- Tampering detection & 3 motion area setup
- Remote motion storage to google Drive and Dropbox
- Built-in varifocal lens 3-10.5mm
- Support SD card continuous recording
- 3 steps IR control
- Day/night profile adjustment
- Mobile view support (push video)
- POE support
- ONVIF compliant
- P2P function option




3-step IR Intensity



4K x 2K



Save Until 20% of HDD Space

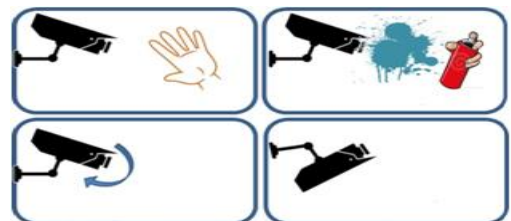

Tampering Detection

Specification



YUC-HL89

Server	Compression	H.264 / MJPEG
	Resolution	3840x2160@15fps, 3776x2160@15fps, 2592x1944@15fps, 2048x1536@15fps, 1920x1080@15fps, 1280x720@15fps, 640x480@15fps, 640x360@15fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(15fps)3840x2160
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail / Google Drive / Dropbox
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5)seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.6" Megapixel CMOS sensor
	Optical Lens	Vari-focal 3 ~ 10.5mm/F1.4
	View Angle	31.83~87.22°(H), 17.72~47.10°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 96X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	1 Lux(Color) / 0.5 Lux(B/W)
	IR LED / Range	10pcs + 2pcs High Power / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3DDNR/ IR Intensity
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	Interior line in (Support 2-way)
	Audio Out	Interior line out (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI / DO
	SD Card	SD Card (Recording trigger for schedule, motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 6.48W(IR on) / 3.72W(IR off) PoE Max.: 7.98W(IR on) / 4.80W(IR off)
	Dimen./Weight	132mm(ø) x 108mm(H) / 680g
	Operation Temp.	-20°C ~ +50°C

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina


Dimension

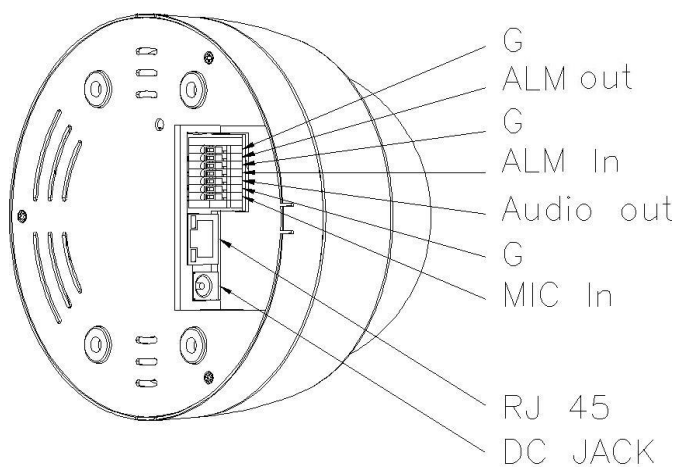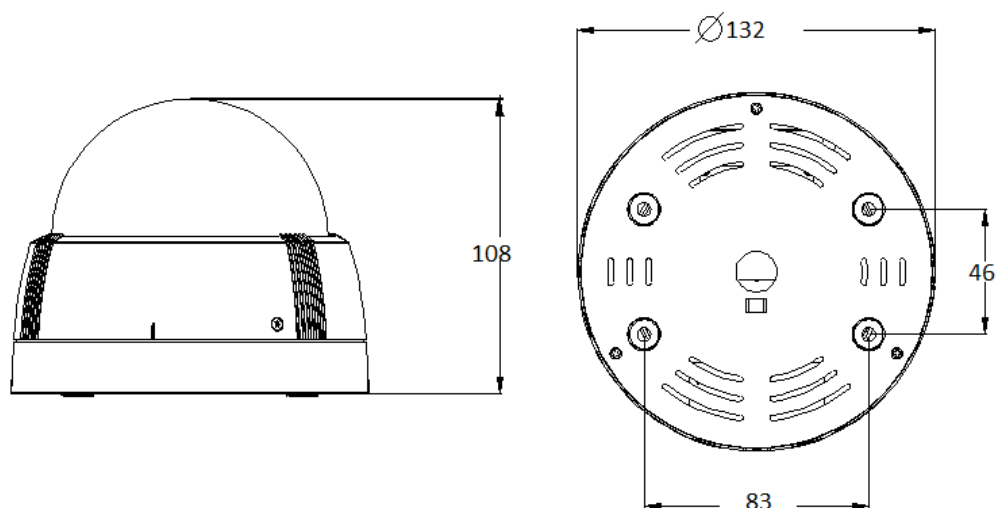

Accessories



YUK-D07
L-Type bracket (option)



YUK-D11
Hidden ceiling mount (option)

