

2MP 60FPS IP DOME CAMERA

YUC-HLA6R

Star Light
-IMX 291




Feature

- H.264 2MP/1080P 60fps, Sony Xarina solution/ Starvis CMOS sensor
- Super high sensitivity and low noise
- Ultra real wide dynamic range
- Built-in IVS for Intrusion, Line-Crossing, Unattended-Object, Missing-Object, face and tempering detection.
- Built-in varifocal lens 2.8~12mm or 3~9mm
- ESD & surge protection design
- Support SD card continuous recording
- Day & night profile with separate setting
- Analogue output
- Mobile view support (push video)
- POE support
- ONVIF compliant



Real Wide Dynamic Range combined frame

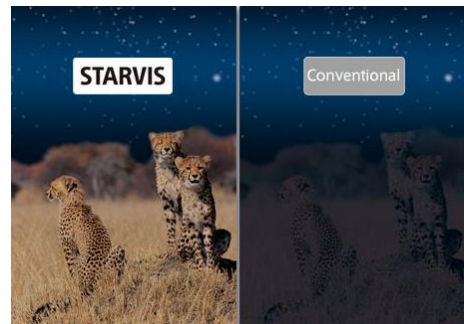

Intrusion

Line Crossing

Unattended Object

Missing Object

Specification


YUC-HLA6R

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	64K ~ 10Mbps
	Max. Frame Rate	(60fps)1920x1080, (30fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 / DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection / Object Detection / I/O / Schedule / Face detection / Tampering detection
Network Camera	Sensor	1/2.8 " SONY Starvis CMOS sensor IMX291
	Optical Lens	2.8 ~ 12mm / F1.4
	View Angle	35.25° ~ 101.52°(H) , 20.37° ~ 53.13°(V)
	WDR	Ture-WDR: 1080p HD 30fps; D-WDR: 1080p HD 60fps
	AGC	16X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000 , 1/10000
	Min Illum	0.001 Lux(Color) / 0.005 Lux(B/W)
	IR LED / Range	18pcs / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI Input
	Intelligent Video	DIS / Real WDR / Privacy Mask / 3D-De Noise Reduction / Motion Detection / Object Detection (Intrusion, Line-crossing, Unattended-object and Missing-object) / Face Detection / Tampering Detection
Audio	Audio	2-way half duplex
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	Interior line in (Support 2-way)
	Audio Out	Interior line out (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	BNC, Video composi(NTSC/PAL)
	External Port	DI / DO
	SD Card	SD Card
General	Operation Voltage	DC 12V Max: 5.16W(IR on) / 3.84W(IR off) PoE Max: 6.72W(IR on) / 5.28W(IR off)
	Dimen./Weight	132mm(Φ) x 108mm(H) / 680g
	Operation Temp.	0°C ~ +45°C

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina


Dimension

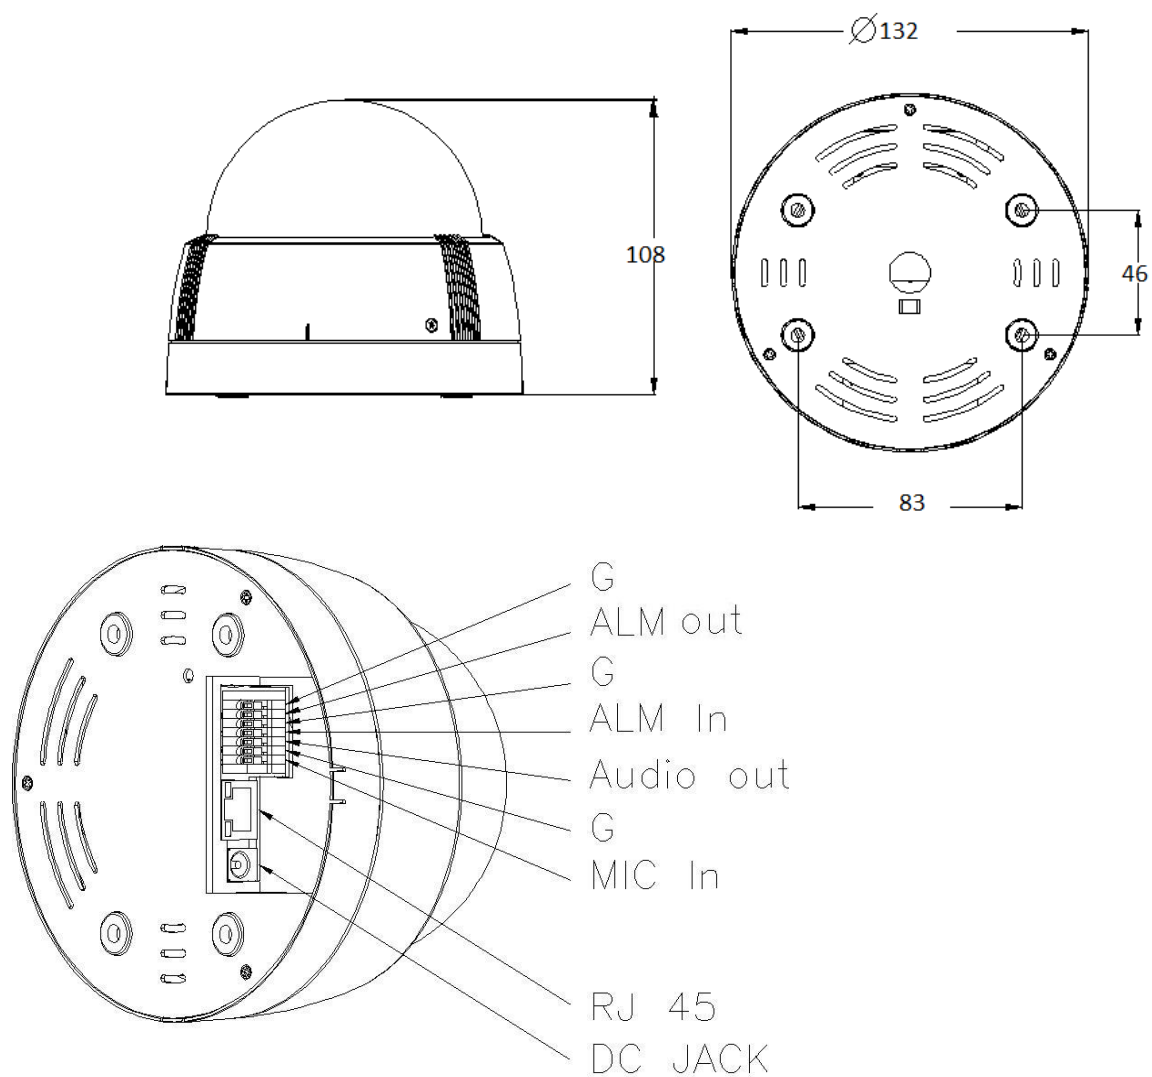

Accessories



YUK-D07
L-Type bracket (option)



YUK-D11
Hidden ceiling mount (option)

