


AI-BASED IP MINI DOME CAMERA




YUC-KHR6

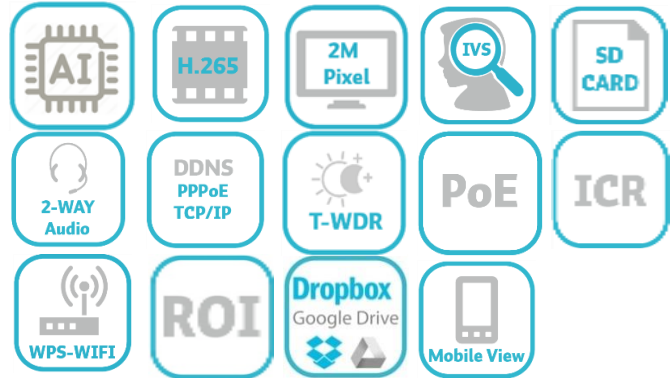

Feature

- IP camera embedded AI technology
- H.265 compression saves bandwidth up to 50%
- 2MP (1920x1080) 30fps real time & True WDR
- Built-in 3.6mm lens
- ROI (Region of Interest) & smart stream function
- ANR (Automatic Network Replenishment) available
- Compact design
- Smart IR to 10 Meter
- Remote motion storage to Google Drive and Dropbox
- Day/night profile adjustment
- Mobile view support (push video)
- PoE support / Wifi (WPS) optional
- ONVIF compliant


Low Bandwidth

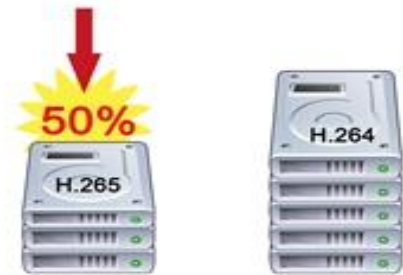

Save Until 50% of HDD Space



Restriction Zone



Loitering Duration



Queue Management



Smart Parking



Fall Detection




People Counting

Specification

YUC-KHR6

Server	Compression	H.265 / H.264 / MJPEG, 3 Streams
	Resolution	1920x1080@30fps, 1280x720@30fps, 640x480@30fps, 640x360@30fps, 320x240@30fps, 176x144@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, SSL, TLS, DNS, ICMP, IGMP, ARP, SMTP, QoS/DSCP, IEEE 802.1X, RTSP/RTP/RTCP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, Google Drive, Dropbox, ONVIF Profile S, RTMP
	Number of User	Max. 10 connections
	Alerting	SMTP / FTP / Samba / SD card / IO / Google Drive / Dropbox
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for Alarm	Motion Detection / IO / Tampering Detection / Sound Detection
Network Camera	Sensor	1/2.8" Megapixel CMOS sensor
	Optical Lens	3.6mm / F2.0
	View Angle	3.6mm Lens: 85°(H), 45°(V)
	WDR	Ture WDR 120dB
	AGC	8X ~ 128X
	Shutter Time	Outdoor / Indoor / 1/30, 1/50, 1/60, 1/100, 1/125, 1/250, 1/500, 1/1000, 1/5000, 1/10000
	Min Illum	0.05 Lux (Color), 0.01 Lux (B/W)
	IR LED / Range	6pcs 5φ LED / 10M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Feature	ROI / Smart Stream / IVA: Double Trigger: Motion + IO / Tampering Detection / Sound Detection / Lens Distortion Correction (LDC) / Anti Fog / True WDR / Corridor Mode / Privacy Mask / 3D-De Noise / Smart IR / Cloud Backup / ANR (Automatic Network Replenishment) / Push Video Notification / P2P Optional / Wifi (WPS) Optional
Audio	Audio Compression	G.711(64Kbps) / G.726(32Kbps, 24Kbps) / AAC audio compression
	Adjust Volume	Mic-in / Audio-out web adjustable
	Audio In	Microphone built-in, support 2 way
	Audio Out	External Line out, support 2 way
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11b/g/n) optional
	Video Interface	--
	External Port	DI x 1 / DO x 1 / Default x 1
	SD Card	Micro SD Card Slot support up to 256G (Recording trigger for schedule, Motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 4.5W / PoE Max: 5.7W / Wifi: 5.5W
	Dimen./Weight	100mm(φ) x 49mm(H) / 180g
	Operation Temp.	0°C ~ +45°C
	Enclosure Certificate	--

Dimension

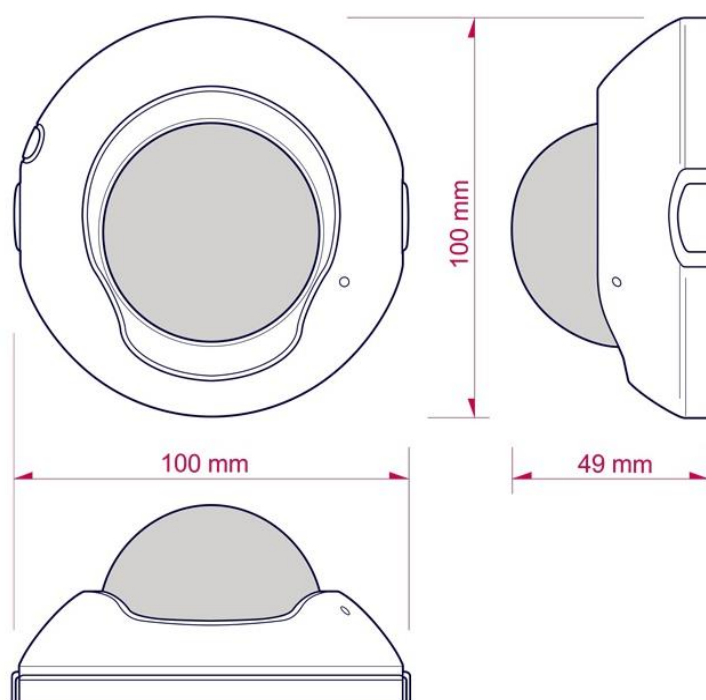

Accessories (Optional)



YUK-D08 Mounting Bracket