


H.265 4MP AUTO FOCUS IP VANDAL DOME CAMERA

YUC-Ki82MU

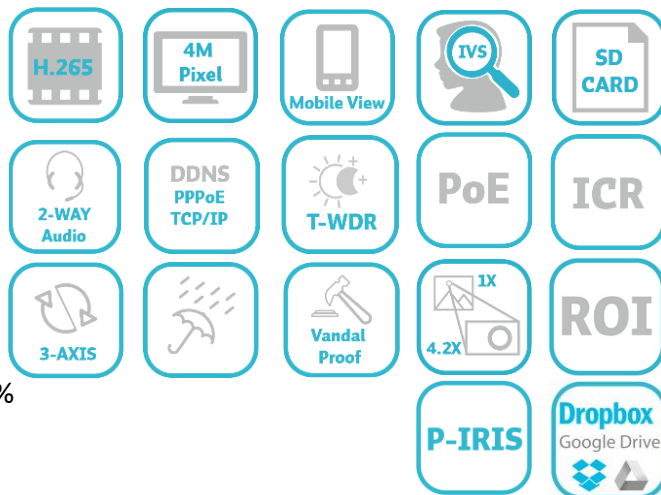

Feature

- H.265 compression saves bandwidth up to 50%
- Quad stream
- Tampering detection & 3 motion area setup
- 4MP (2592x1520) 25fps real time & True WDR
- Excellent night vision performance with low noise
- Remote motion storage to google Drive and Dropbox
- Built-in 4.2X P-IRIS zoom lens 2.8-12mm
- ROI (Region of Interest) function
- ESD & surge protection design
- Support SD card continuous recording
- Day/night profile adjustment
- 3-Axis adjust
- Vandal proof & weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant



Conventional Lens



P-iris Lens


Low Bandwidth



Save Until 50% of HDD Space



IR Optimizer

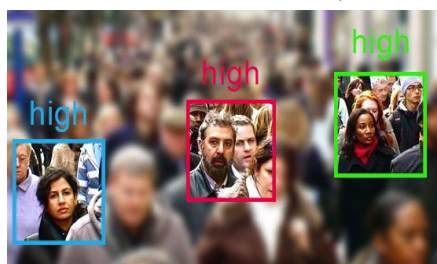

Region of Interest for 3 areas



Dark frame

Light frame

Real Wide Dynamic Range combined frame

Specification


YUC-Ki82MU

Server	Compression	H.265 / H.264 / MJPEG
	Maximum Streams	4 simultaneous streams
	Resolution	2592x1520@25fps, 2048x1536@30fps, 1920x1080@30fps, 1600x1200@30fps, 1280x960@30fps, 1280x720@30fps, 800x600@30fps, 640x480@30fps, 640x360@30fps, 320x240@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(25fps)2592x1520
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
	Number of User	Max. 10 connections
	Alerting	SMTP / FTP / Samba / Micro SD / I/O /Google Drive / Dropbox
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering Detection / Sound Detection
Network Camera	Sensor	1/3" Megapixel CMOS sensor
	Optical Lens	Motorized P-IRIS lens 2.8-12mm / optical 4.2X zoom in /F1.4
	View Angle	35~90°(H);24~49°(V)
	WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000, 1/5000, 1/10000
	Min Illum	0.08 Lux (Color), 0.03 Lux (B/W)
	IR LED / Range	12pcs + 2pcs High Power / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	ROI / DIS / T-WDR / D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3D-De Noise Reduction / IR Optimizer / Anti-fog / IR Intensity / Sound Detection / Corridor Mode / Distortion correction
Audio	Audio	2-way
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	External audio in (Support 2-way)
	Audio Out	External line out (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	BNC, Video Composit (NTSC / PAL)
	External Port	DI / DO
	SD Card	Micro SD Card(Recording trigger for schedule, motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 5W / 8.5W (heater option) PoE Max.: 6.3W / 10W (heater option)
	Dimen./Weight	137mm(ø) x 102mm(H) / 890 g
	Operation Temp.	-20℃ ~ +50℃ / -30℃ ~ +50℃ (heater option)
	Waterproof	IP66
	Vandal Proof	IK10

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Dimension

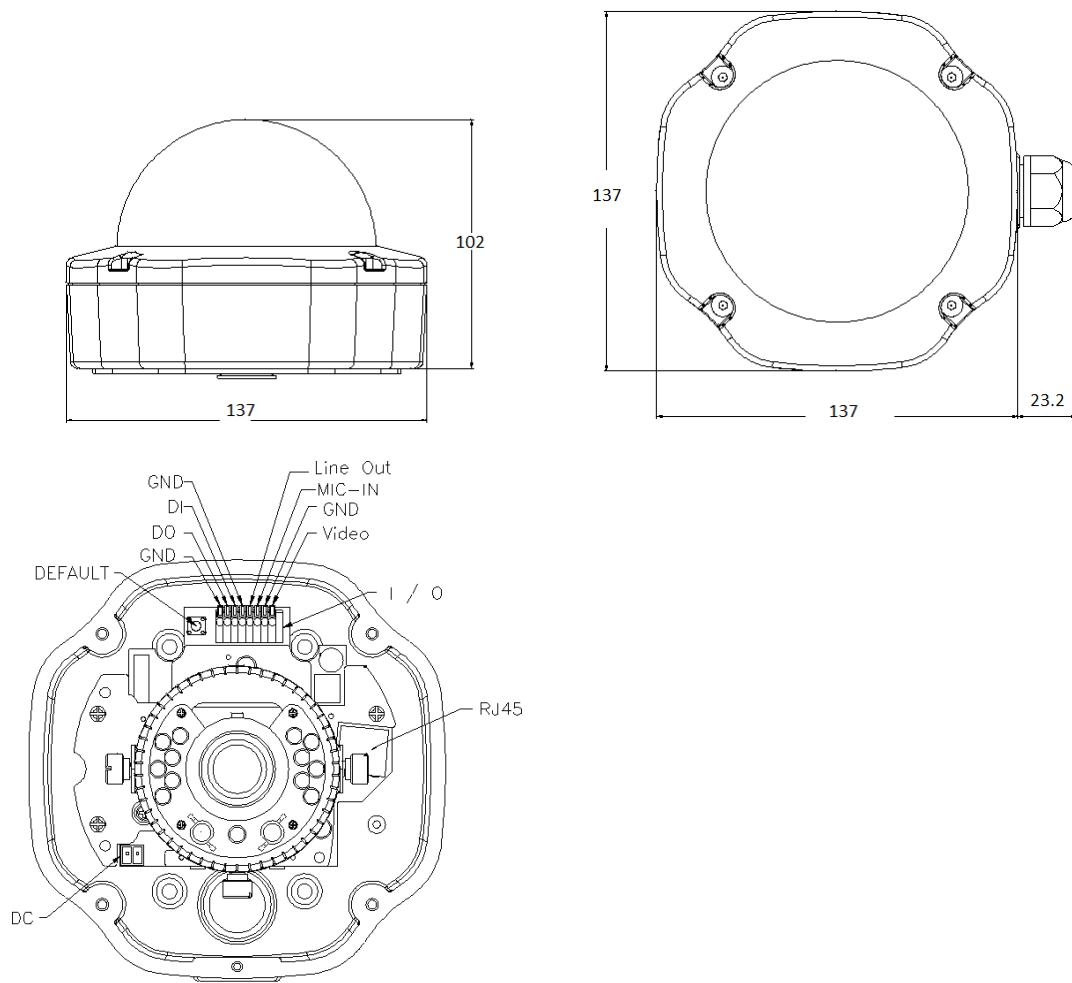

Accessories (Option):



YUK-D07
L-Type bracket



YUK-D09
Quick Install Plate



YUK-D10
Pole mount bracket