

2MP INDOOR IP SPEED DOME CAMERA

YUC-KX20-I



Feature


- H.265 2MP/1080P 30fps IP speedome
- 20X optical zoom with 4X digital zoom
- Digital image stabilization / Digital WDR
- Point- to- go for easy PTZ control (patrol groups)
- ROI function x 3 areas & Privacy zone mask x 6 areas
- Support cruise x 8 groups & 256 preset points
- Storage support to the Cloud (Google Drive / Dropbox)
- Support SD card continuous recording up to 128GB
- Mobile view support (push video)
- POE support
- Wifi / P2P function option
- ONVIF compliant



Save Until 50% of HDD Space



Point-To-Go

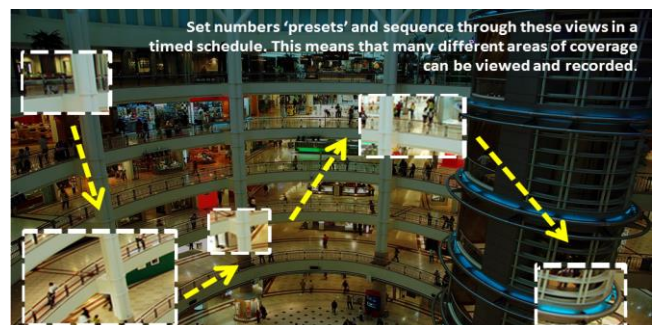


Patrol



Region of Interest



Privacy Mask

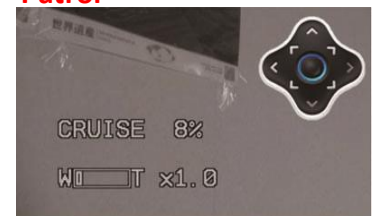

Cruise

Specification



YUC-KX20-I

Server	Compression	H.265/ H.264 / MJPEG
	Resolution	1920x1080@30FPS / 1280x720@30FPS / 640x480@30FPS / 320x240@30FPS / 176x144@30FPS
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps) 1920x1080
	Safety	User-ID and password, IP address filtering, HTTP encryption,
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA
	Number of User	Max. 10 connections
	Storage Capacity	FTP / NAS(Samba) / E-mail/ Google Drive / Dropbox / Micro SD
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ DI / Schedule / IP check / Network break down (wire only)
Network Camera	Sensor	1/2.9" CMOS sensor 2 Megapixel
	Optical Lens	20X optical zoom lens / f=4.7 - 94mm / F1.6 - 2.8
	Shutter Time	1/30 ~ 1/5000
	Min Illum	0.05 Lux(Color) / 0.005 Lux(B/W)
	IR LED / Range	--
	Sense up	--
	View Angle	Wide: 3.48°~62.6°/s / Tele: 2°~39.16°/s
	Pan / Tilt Range	Pan: 360° / Tilt: 0°~90° auto flip
	Preset Points	256 points
	Manual Control Speed	Pan: 0.45°~ 90°/s / Tilt: 0.35°~45°/s
	Day / Night	Auto / Color / B/W / Time Mode with auto ICR
	Intelligent Video	ROI / Privacy Mask / Tampering Detection / Motion Detection / T-WDR (Available upon request) D-WDR / Cruise / Point-to-Go / Diagonal Movement / Present Points (Patrol Groups) / De-Fog
Audio	Audio	2-way
	Audio Compression	G.711(64K) / G.726(24K) /G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	3.5mm phone jack (Support 2-way)
	Audio Out	3.5mm phone jack (Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	2 DI / 1 DO
	SD Card	Micro SD(Up to 128GB)
General	Operation Voltage	DC 12V Max: 9.96W PoE Max: 15.74W
	Dimen./Weight	150mm(Φ) x 161.3mm(H) x 149mm(W) / 1.4 Kg
	Operation Temp.	-10°C ~ +50°C
	Waterproof	--

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Dimension

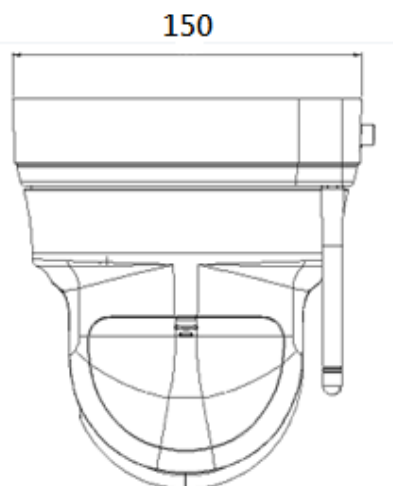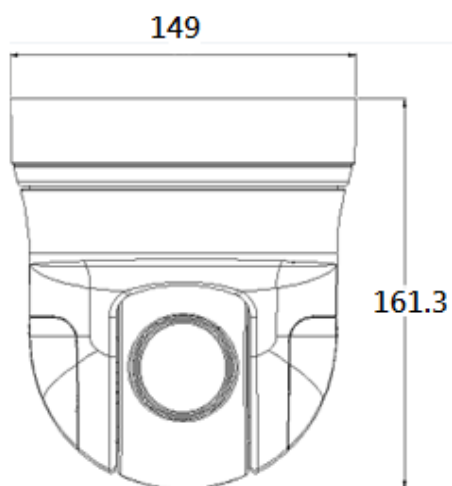

Accessories (option)



YCK-10DX
USB 3D Keypad



A-PP03
Hidden Ceiling Mount